

PROTECT VENTSORB® 120R Sales Specification – Regenerable



PROTECT VENTSORB® 120

DESCRIPTION

The **PROTECT VENTSORB® 120R** is an activated carbon adsorber designed to treat air streams containing Hydrogen Sulphide (H₂S) and other odourous compounds.

The **PROTECT VENTSORB® 120R** uses the patented **CENTAUR® HSV** catalytic non-impregnated carbon which can be regenerated in-situ with water to extend the bed life of the activated carbon before replacement.

Hydrogen Sulphide and mercaptan are converted into water washable sulphuric acid and sulphonic acid respectively, while other contaminants are adsorbed. The **PROTECT VENTSORB® 120R** comes complete with pipework and fittings to allow water regeneration of the unit.

The air or gas flows through the unit in an upflow direction and the unit is normally utilised as the end of pipe. The outlet should be monitored periodically to check the activated carbon is achieving the treatment objective. For larger flows or duties, a number of units can be used in parallel.

FEATURES

- Longer bed life through in-situ regeneration of the activated carbon.
- Continuous treatment at varying flow rates and concentrations
- Simple installation and operation
- Corrosion resistant materials

CARBON TYPE FOR ODOUR CONTROL

Compounds	Recommended Carbon Type	Quantity Kg
H ₂ S and Mercaptans	CENTAUR® HSV	510

See specific carbon bulletin for additional information, including the bulletin "Regeneration procedure for **CENTAUR® HSV**."

REGENERABLE OPTION



With **Chemviron Carbon's** patented **CENTAUR® HSV**, a regenerable option is available which has additional connections to allow regeneration of the unit with water.

CENTAUR® HSV is a high activity non-impregnated activated carbon designed specifically for its improved properties in odour removal from sewage treatment applications. This patented product is unique in that it provides a high capacity for H₂S removal without requiring chemical impregnates.

CENTAUR® HSV has enhanced catalytic properties, which promote a fast reaction between the odourous sulphur compounds and oxygen present in the air. H₂S and mercaptans are converted respectively into water washable sulphuric acid and sulphonic acid, while the other contaminants are readily adsorbed.

PACKAGING

The empty unit and carbon are supplied separately. This is to allow easy handling. The carbon is normally supplied in fiber drums.

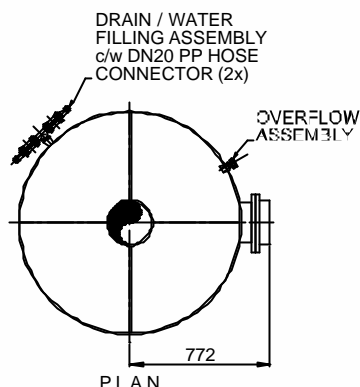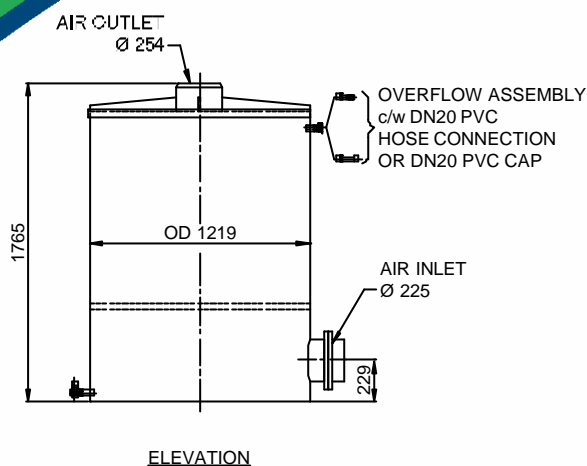

TECHNICAL DESCRIPTION - REGENERABLE

Carbon volume per adsorber	1000 l max.
Flow rate, maximum	1800 m ³ /h
Temperature, maximum	65°C
Pressure, maximum ¹	0.04 bar (gauge) or 4 kPa
Diameter adsorber	1200 mm
Straight side adsorber	1600 mm
Connection – gas inlet	DN225 with flange for blinding
Connection – gas outlet	254 mm straight nozzle
Bottom Connection – water inlet and drain	2 x DN20 PP hose connector with valve
Top overflow assembly – Closed end or liquid outlet	DN20 PVC cap or DN20 PVC hose connection
Vessel and pipe materials	All H ₂ SO ₄ resistant (PE, PP and PVC)
Distributor	Flat internal support, polypropylene mesh
Water flow rate - upflow	½ bed volume / hour or 500 liter / hour
Footprint	1.3 x 1.3 m
Height – upright	1.765 m
Recommended clearance	2.2 m
Shipping Weight	Empty adsorber: 95 kg Carbon: 560 kg
Weight – operating (flooded)	Adsorption: 989 kg Regeneration: 2095 kg

¹The unit is not vacuum rated, can stand only 2 kPa vacuum.

SAFETY MESSAGE


Wet activated carbon preferentially removes oxygen from air. In closed or partially closed containers and vessels, oxygen depletion may reach hazardous levels. If workers are to enter a vessel containing carbon, appropriate sampling and work procedures for potentially low-oxygen spaces should be followed.

QUALITY

Each of our worldwide operations has achieved **ISO9001** certification for their quality management system related to activated carbon. **Chemviron Carbon** guarantees the specifications against representative sampling.

PRESSURE DROP

Typical Pressure Drop of
VENTSORB[®] 120R - CENTAUR[®] HSV

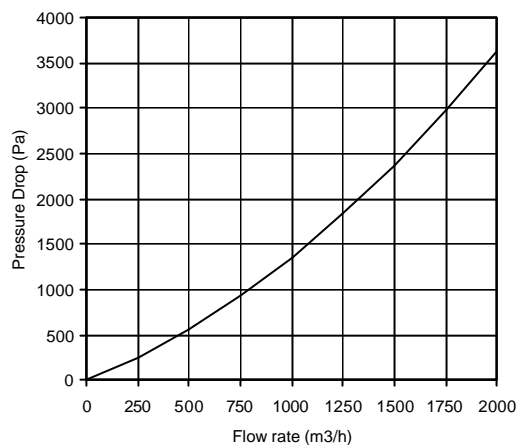

CHEMVRON CARBON

Chemviron Carbon, the European operation of Calgon Carbon Corporation, is a global manufacturer, supplier, and developer of granular activated carbon, innovative treatment systems, value added technologies, and services for optimizing production processes and safely purifying the environment.

With our experience developed since the early years of the twentieth century, facilities around the world and a world-class team of over 1,200 employees, Calgon Carbon Corporation can provide the solutions to your most difficult purification challenges.

N.B. Chemviron Carbon reserves the right to change specifications without notice. All rights reserved for reproduction in part or in full without prior permission from Chemviron Carbon.

Visit our website at www.chemvironcarbon.com

ES-1230 – E – 19.07.2006



Corporate Headquarters
400 Calgon Carbon Drive
Pittsburgh, PA 15205, USA
Tel.: +1 (0) 412 787-6700
Fax: +1 (0) 412 787-6713

**Chemviron
Carbon**

European Operations of
Calgon Carbon Corporation
Zoning Industriel C de Feluy
B - 7181 Feluy, Belgium
Tél.: +32 (0) 64 51 18 11
Fax: +32 (0) 64 54 15 91

Your local office

